





1. Taboe Sani
2. Taboe
3. Taboe Freestanding

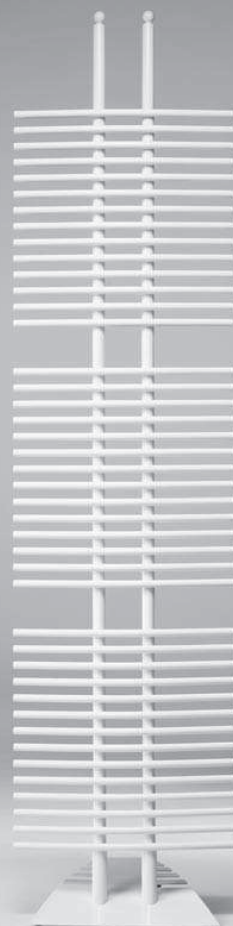


1

2

1. Taboe Sani Single
2. Taboe Sani Double

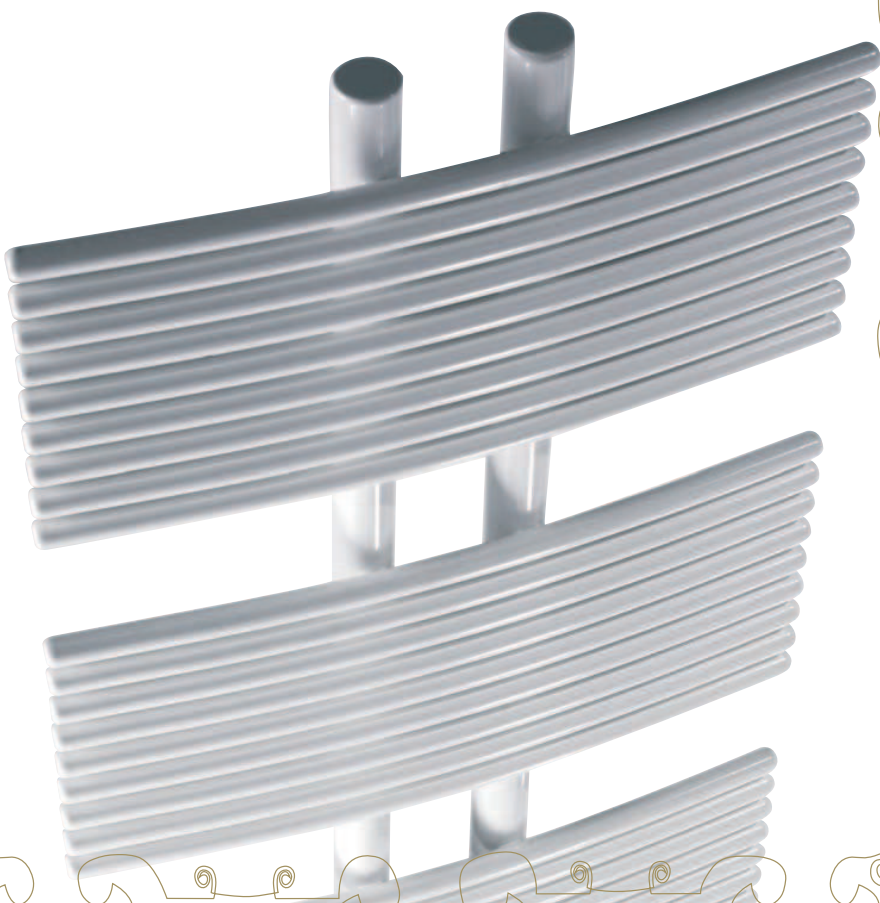


Taboe Sani

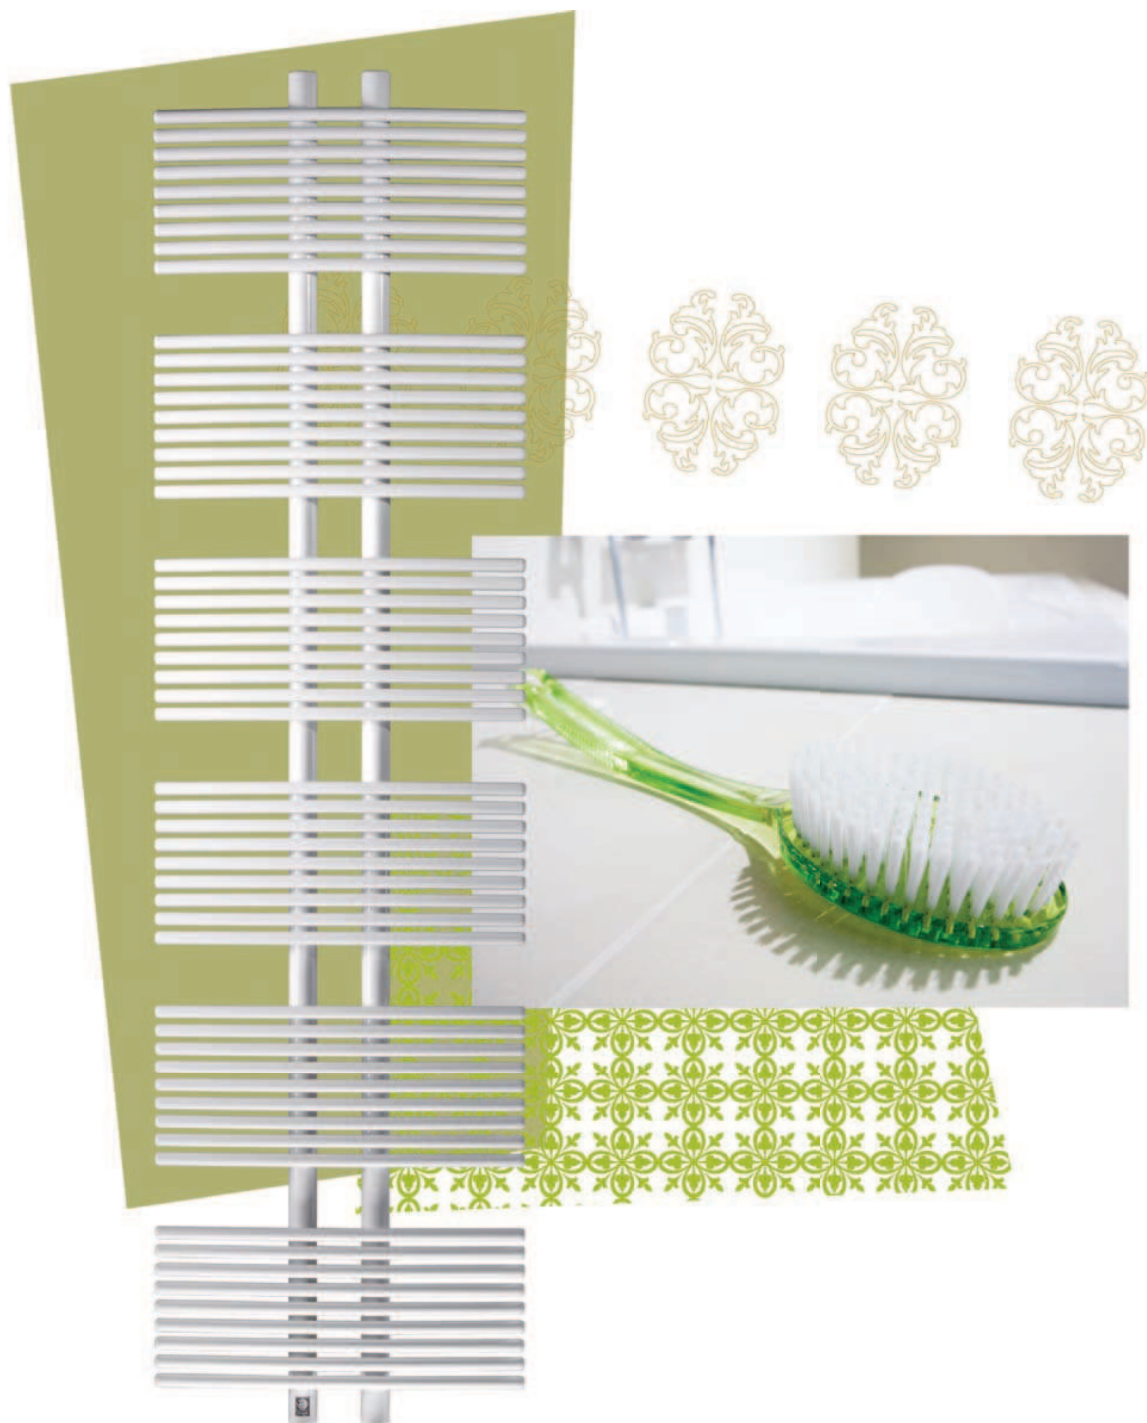


Taboe Sani

Dimensions

TSSW_Taboe Sani Single Wall




TSDW_Taboe Sani Double Wall

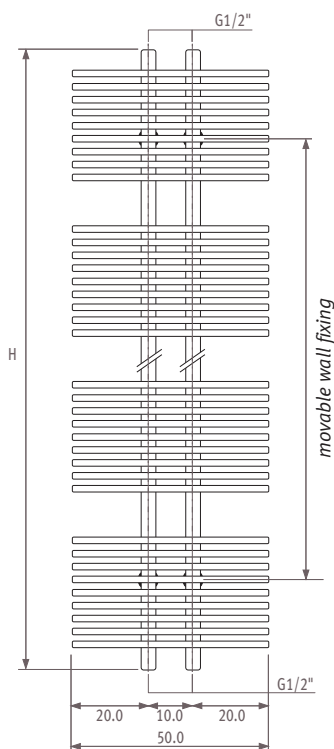

Connections

Code: 1° number = flow
2° number = return




Standard connection


Code 18

Connection 18 or 81

To the floor:



To the wall:




Top end connection

Ordering code: specify 45 or 54 instead of 18.
Insert pipe is delivered without surcharge, to be mounted in the return. Provide an air vent on the central heating tube.

With electric element

Ordering code: Standard code 18, and order an electric element.




Mixed

Ordering code: standard code 18.


Order an electric element and T-piece.

- Fit the T-piece together with the electric heating element for connection to the central heating wet system.
- Never isolate the radiator from the expansion system, in other words never cut off the return of the radiator.




Range

Single

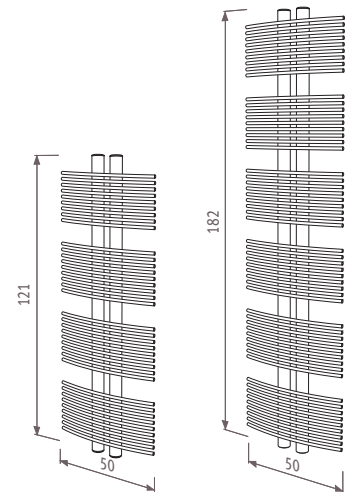

Double

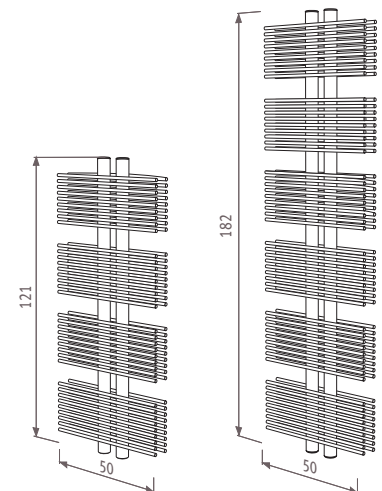

Outputs

Taboe Sani_single

code height length colour conn.
ORDERING CODE: TSSW. 121 050. XXX /18


| H | | L 050 |
|-----|----------------------|-------------|
| 121 | 75/65/20 90/70/20 | 590 759 |
| 182 | 75/65/20 90/70/20 | 887 1143 |

Standard delivery

- central connection 18 underneath
- wall fixing set
- chrome-plated air vent and drain cock

Standard colours:

- white (333) RAL 9016 satin
- white (301) RAL 9010 satin
- sandblast grey metallic 001



Taboe Sani_double

code height length colour conn.
ORDERING CODE: TSDW. 121 050. XXX /18


| H | | L 050 |
|-----|----------------------|--------------|
| 121 | 75/65/20 90/70/20 | 800 1018 |
| 182 | 75/65/20 90/70/20 | 1206 1545 |

Standard delivery

- central connection 18 underneath
- wall fixing set
- chrome-plated air vent and drain cock

Standard colours:

- white (333) RAL 9016 satin
- white (301) RAL 9010 satin
- sandblast grey metallic 001




Taboe Sani_single brushed stainless steel

code height length colour conn. type
ORDERING CODE: TSSW. 121 050. 011 /18 /SP

| H | | L 050 |
|-----|----------------------|------------|
| 121 | 75/65/20 90/70/20 | 459 581 |
| 182 | 75/65/20 90/70/20 | 627 799 |

Standard delivery

- brushed stainless steel
- central connection 18 underneath
- wall fixing set
- chrome-plated air vent and drain cock




Taboe Sani_double brushed stainless steel

code height length colour conn. type
ORDERING CODE: TSDW. 121 050. 011 /18 /SP

| H | | L 050 |
|-----|----------------------|-------------|
| 121 | 75/65/20 90/70/20 | 664 847 |
| 182 | 75/65/20 90/70/20 | 967 1239 |

Standard delivery


- brushed stainless steel
- central connection 18 underneath
- wall fixing set
- chrome-plated air vent and drain cock



Output measured in accordance with EN442, at a water temperature of 75/65 and a room temperature of 20°C ($\Delta T=50$).


Options

Electro heating

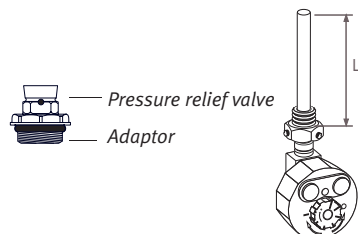


| CODE | H | type radiator | WATTS | L |
|---------|-----|---------------|-------|------|
| 9096.12 | 121 | single | 900 | 51.5 |
| 9096.13 | 121 | double | 1200 | 66.0 |
| 9096.13 | 182 | single | 1200 | 66.0 |
| 9096.14 | 182 | double | 1500 | 82.0 |

T-piece for mixed application



| CODE | colour |
|---------------------|---------------|
| TPCE.004.009 | chrome |
| TPCE.004.XXX | 201 up to 233 |
| | 301 up to 333 |
| fill in colour code | |

Insert pipe for top end connection




Will be delivered without surcharge if the top end connection code is indicated 45 or 54 instead of 18.

| CODE | H radiator | L |
|-----------|------------|-----|
| 9097.1100 | 121 | 110 |
| 9097.1660 | 182 | 166 |

Electro heating element with infra-red operation

Only for Taboe Sani Single


- Finish: white ABS
- Transmission range: ± 6 m in all directions
- Receiver has to be placed at the back of the radiator.
- Insulation Class 1



| CODE | WATTS | L |
|----------|-------|----|
| 9096.510 | 600 | 47 |
| 9096.520 | 900 | 68 |


Connection electric element

- Fit the electric heating element vertically in the socket 1 or 8. The pressure release valve which is included should be fitted into socket 4 or 5, (3 bar).
- Do not switch the radiator on before filling it completely with water.
- Top up with water after the first total heating up of the radiator.

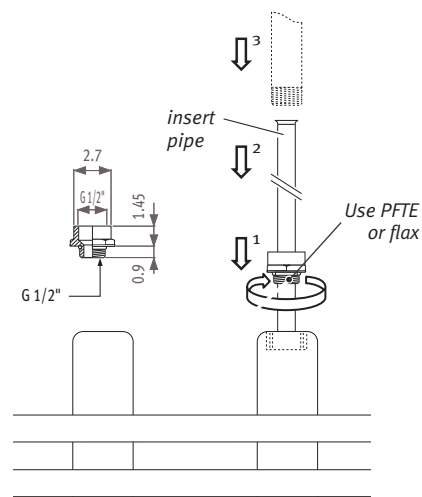

For more information see Technical info.

Taboe Sani

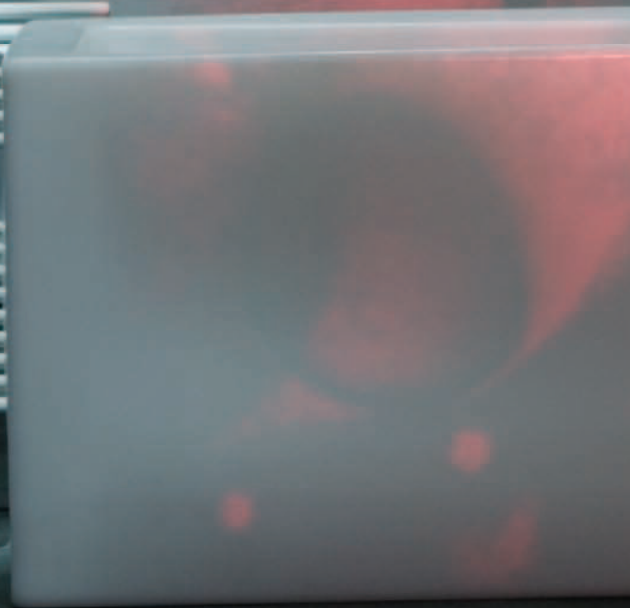

1

2

1. Taboe
2. Taboe Freestanding



Taboe




Taboe

Dimensions


TABW_Taboe Wall

- for central heating
- 100% electric
- mixed

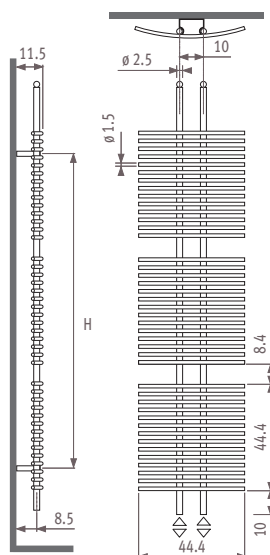


TABF_Taboe Free-standing

- with electric element

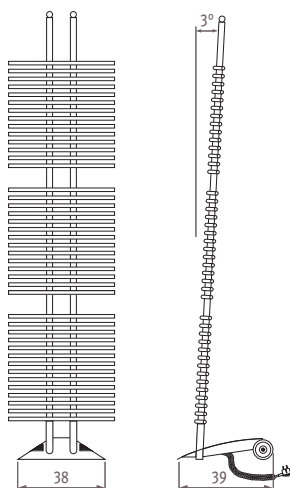

Connections




Standard connection


Code 18

Connection 18 or 81

To the floor:




To the wall:



With electric element

Fitted with an on/off switch: order wall model EL (electric).

Fitted with thermostatic: order wall mounted model central heating + element. See page 78




Mixed

Ordering code: standard code 18.

Order an electric element and T-piece.


- Fit the T-piece together with the electric heating element for connection to the central heating wet system.

- Never isolate the radiator from the expansion system, in other words never cut off the return of the radiator.




Range

TABW_Taboe Wall

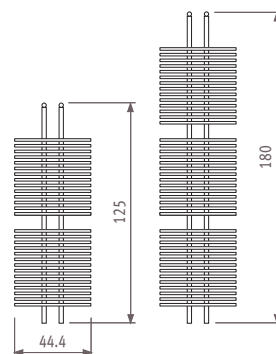

TABF_Taboe Free-standing



Outputs


Taboe wall mounted model_C.H.

code height length colour conn.
ORDERING CODE: TABW. 125 044. XXX /18

| H | L 044 | |
|-----|----------------------|------------|
| 125 | 75/65/20 90/70/20 | 432 546 |
| 180 | 75/65/20 90/70/20 | 629 792 |

Standard delivery

- 2 wall fixing brackets in the same colour as the radiator
- invisible inside sockets 1/2" at the bottom end of the collector tubes
- air venting via the round balls at the top end of the collector tubes



Taboe wall mounted model_EL

code height length colour conn.
ORDERING CODE: TABW. 125 044. XXX /EL

| H | L 044 | |
|-----|-------|-----|
| 125 | WATTS | 600 |
| 180 | WATTS | 900 |

Standard delivery

- Supplied completely fitted and filled, including electric heating element with a cable of 2.5 m and a plug with an on / off switch
- 2 wall fixing brackets in the same colour as the radiator




Taboe wall mounted model_MX

code height length colour conn.
ORDERING CODE: TABW. 125 044. XXX /MX

| H | L 044 | |
|-----|-------|-----|
| 125 | WATTS | 600 |
| 180 | WATTS | 900 |

Standard delivery

- 2 wall fixing brackets in the same colour as the radiator
- invisible inside sockets 1/2" at the bottom end of the collector tubes
- electric element with thermostat Class I
- Length wire: 1.2 m
- T-piece in the same colour as the radiator
- air venting via the round balls at the top end of the collector tubes




Taboe Freestanding_EL

code height length colour conn.
ORDERING CODE: TABF. 125 044. XXX /EL

| H | L 044 | |
|-----|-------|-----|
| 125 | WATTS | 600 |
| 180 | WATTS | 900 |

Standard delivery

- Supplied completely fitted and filled, inclusive electric heating element with a cable of 2.5 m and a plug with an on / off switch
- foot in the same colour as the radiator



Output measured in accordance with EN442, at a water temperature of 75/65 and a room temperature of 20°C ($\Delta T=50$).